

## imageRUNNER ADVANCE DX C3900 Series

Print up to 35 ppm (BW/color)

Scan up to 270 ipm (300 dpi) (BW/color, duplex)

Print up to 12" x 18"

2,300-sheet maximum paper capacity

Canon's comprehensive portfolio of imageRUNNER ADVANCE DX multifunction printers and integrated solutions can help **simplify** the end user experience and management of technology, better **control** sensitive information and print-related costs, and help ensure that technology investments proactively **evolve** with changing needs.



### WORKFLOW EFFICIENCY

- A large, 10.1" responsive and intuitive touchscreen with smartphone-like usability, making operation clear and virtually seamless.
- Consistent interface across the imageRUNNER ADVANCE DX product line, allowing work to proceed effortlessly and with a minimal learning curve.
- A unique, customized experience that can be tailored to individual preferences using My ADVANCE.
- Supports mobile solutions and integration with many popular cloud services like Google Drive.<sup>1</sup>
- Scan and convert documents to searchable digital files in a variety of file formats.
- Integration with Canon and various third-party software with embedded application platform.



### SECURITY

- Advanced standard security feature set to help safeguard sensitive information and assist in regulatory compliance.
- Integrates with existing, third-party SIEM\*<sup>2</sup> systems to help provide real-time, comprehensive insights into potential threats to the network and printers.
- Technology to verify that the device boot process, firmware, and applications initialize without alteration at setup. Includes automatic recovery of boot process for self resiliency.
- McAfee Embedded Control<sup>3</sup> utilizes whitelisting to help protect against malware and tampering of firmware and applications.
- Security settings can be established at once by selecting the environment type in Recommended Security Settings. Security policy settings can be configured from a central location and exported to other supported devices.
- Control access to the device and specific features using a host of flexible authentication methods—PIN code, user name/password, or card access.<sup>4</sup>



### QUALITY AND RELIABILITY

- Canon's signature reliability and engine technologies help keep productivity high and minimize the impact on support resources.
- Outstanding imaging technologies and toner allow for consistently striking images, thanks to Canon's V<sup>2</sup> color profile.
- Designed to achieve maximum uptime with status notifications that help keep supplies replenished and intuitive maintenance videos for consumables replacement.
- imageRUNNER ADVANCE models have received many awards and recognition from leading industry analysts, often referencing strong reliability. This includes the 2022-2024 BLI Most Reliable A3 Brand Award from Keypoint Intelligence.



## DEVICE AND FLEET MANAGEMENT

- Designed for quick, easy deployment.
- Remote diagnostics and parts life management for proactive maintenance and rapid fixes.
- Easy and intuitive to monitor device status and consumable levels, turn off devices remotely, observe meter readings, manage settings, and implement security policies.
- Common firmware and regular updates with Unified Firmware Platform (UFP) for continuous improvements and consistency across a fleet.



## COST MANAGEMENT

- Track and assess print, copy, scan, and fax usage and allocate costs to departments or projects.
- Apply print policies and restrict usage by user to help reduce unnecessary printing and contribute to cost efficiency.
- Standard cloud-based solution provides a centralized dashboard with up-to-the-minute insights into printer activity.
- Upgrade to uniFLOW server or cloud-based solutions for full accounting and reporting for compatible Canon and third-party devices, pull printing, job routing, and powerful scan workflows.



## SUSTAINABILITY

- A combination of fusing technologies and lower-melting-point toner minimizes power requirements and helps achieve low energy consumption.
- Environmentally friendly packaging utilizes recyclable cardboard.
- Drum covers are constructed of regrind plastic, helping to lower environmental impact.
- ENERGY STAR® certified and rated EPEAT® Gold.<sup>5</sup>

## CONFIGURATION OPTIONS

## imageRUNNER ADVANCE DX C3900 Series



INNER 2-WAY TRAY-M1



INNER FINISHER-L1


- 2-tray, 550-sheet capacity
- Corner and double stapling up to 50 sheets within the footprint of the main unit
- Supports Staple-free Stapling and Staple On Demand
- Supports optional internal 2/3-hole puncher (Inner 2/3 Hole Puncher-D1)



UTILITY TRAY-B1



COPY TRAY-T1

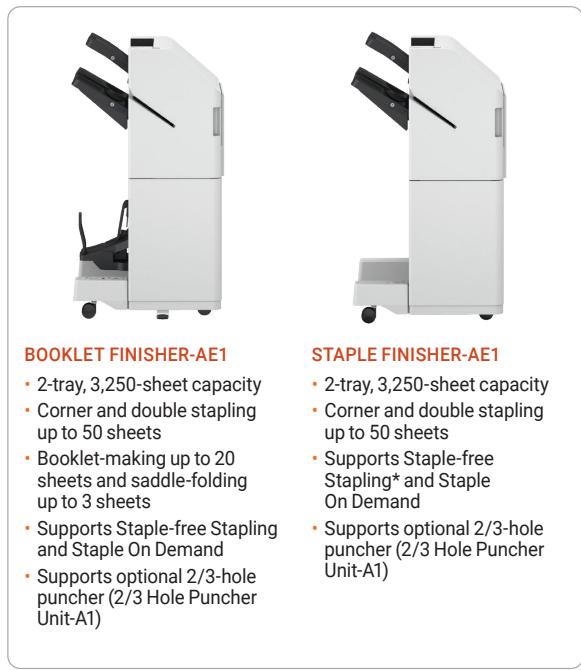

BOOKLET FINISHER-AE1

- 2-tray, 3,250-sheet capacity
- Corner and double stapling up to 50 sheets
- Booklet-making up to 20 sheets and saddle-folding up to 3 sheets
- Supports Staple-free Stapling and Staple On Demand
- Supports optional 2/3-hole puncher (2/3 Hole Puncher Unit-A1)

STAPLE FINISHER-AE1

- 2-tray, 3,250-sheet capacity
- Corner and double stapling up to 50 sheets
- Supports Staple-free Stapling\* and Staple On Demand
- Supports optional 2/3-hole puncher (2/3 Hole Puncher Unit-A1)



CASSETTE FEEDING UNIT-AW1

- Two 550-sheet cassettes
- Supports up to 12" x 18"
- Supports 14 lb. Bond to 80 lb. Cover

CABINET TYPE-W

\* Staple-Free stapling, up to 10 pages of 17 lb. Bond.

**Main Unit****Type**

Color Laser Multifunctional

**Core Functions**

Standard: Print, Copy, Scan, Send, Store

Optional: Fax

**Processor**

1.8 GHz Dual Core Processor

**Control Panel**

10.1" TFT LCD WSVGA Color Touch-panel

**Memory**

3.5 GB RAM

**Solid State Drive**

Standard: 256 GB/Maximum: 1 TB

**Interface Connection**

Network: 1000Base-T/100Base-TX/10Base-T

Optional: Wireless LAN Board F-1

**Others**Standard: USB 2.0 x1 (Host), USB 3.0 x1 (Host),  
USB 2.0 x1 (Device)

Optional: Copy Control Interface, Serial Interface

**Paper Capacity (LTR, 20 lb. Bond)**

Standard: 1,200 Sheets

Maximum: 2,300 Sheets

**Paper Sources (LTR, 20 lb. Bond)**Standard: Dual 550-sheet Paper Cassettes,  
100-sheet Multipurpose TrayOptional: Dual 550-sheet Paper Cassettes  
(Cassette Feeding Unit-AW1)**Paper Output Capacity (LTR, 20 lb. Bond)**

Standard: 250 Sheets

Maximum: 3,450 Sheets  
(with Staple Finisher-AE1/Booklet  
Finisher-AE1 and Copy Tray-T1)**Finishing Capabilities**

Standard: Collate, Group

With Finishers: Collate, Group, Offset, Staple, Saddle-Stitch,  
Hole Punch, Eco Staple, Staple On Demand**Supported Media Types**Multi-purpose Thin, Plain, Heavy, Recycled, Coated,  
Tray: Color, Tracing, Bond, Transparency,Label, Pre-punched, Envelope,  
Postcard, LetterheadUpper Thin, Plain, Heavy, Recycled, Color,  
Cassette: Tracing, Bond, Transparency, Pre-  
punched, Envelope, Postcard, LetterheadLower Thin, Plain, Heavy, Recycled, Color,  
Cassette: Bond, Transparency, Pre-punched,  
Envelope<sup>6</sup>, Postcard, Letterhead**Supported Media Sizes**

Multi-purpose 12"x18", 11"x17", Legal, Letter, Letter-R,

Tray: Executive, Statement, Statement-R

Custom Size/Free Size: 4" x 5-7/8" to

12" x 18", Envelopes (COM10 No.10,

Monarch, ISO-C5, DL), Envelope Custom

Size (3-7/8" x 3-7/8" to 12-5/8" x 18")

Upper Letter, Executive, Statement-R

Cassette: Custom Size (4-1/8" x 5-7/8" to 11-3/4" x

8-1/2"), Envelopes (ISO-C5)

Lower Cassette: 12" x 18", 11" x 17", Legal, Letter, Letter-R,

Executive, Statement-R, Custom Size

(4-1/8" x 5-7/8" to 12" x 18"), Envelopes<sup>6</sup>

(COM10 No.10, Monarch, DL)

**Supported Media Weights**Cassettes: 14 lb. Bond to 140 lb. Index (52 to 256 g/m<sup>2</sup>)Multipurpose 14 lb. Bond to 110 lb. Cover (52 to 300 g/m<sup>2</sup>)**Tray:**Duplexing: 14 lb. Bond to 80 lb. Cover (52 to 220 g/m<sup>2</sup>)**Print/Copy Speed (BW and Color)**

C3935i: Up to 35 ppm (Letter); Up to 23 ppm

(Letter-R); Up to 17 ppm (Legal/11" x 17")

C3930i: Up to 30 ppm (Letter); Up to 20 ppm

(Letter-R); Up to 15 ppm (Legal/11" x 17")

C3926i: Up to 26 ppm (Letter); Up to 20 ppm

(Letter-R); Up to 15 ppm (Legal/11" x 17")

**Warm-up Time**From Power Approx. 10 Seconds<sup>7</sup>

On:

From Sleep Approx. 10 Seconds<sup>8</sup>

Mode:

Quick Startup Approx. 4 Seconds<sup>9</sup>

Mode:

**Dimensions (W x D x H)**22-1/4" x 28-1/2" x 35-3/8" (565 mm x 722 mm x 897 mm)<sup>10</sup>**Installation Space (W x D)**Basic: 38-1/2" x 44-1/8" (978 mm x 1119 mm)<sup>11</sup>

Fully:

Configured: 65" x 44-1/8" (1651 mm x 1119 mm)<sup>12</sup>**Weight**

Approx. 187.4 lb. (85 kg) including toner

**Print Specifications****Print Resolution (dpi)**

1200 x 600, 1200 x 1200

**Standard Page Description Languages**UFR II, PCL<sup>6</sup>, Adobe<sup>®</sup> PS<sup>®</sup> 3**Supported File Types**

PDF, TIFF, JPEG, EPS, XPS

**Printing from Mobile Devices and Cloud-based Services**A range of standard and optional software and MEAP-based solutions (including AirPrint, Mopria, Universal Print by Microsoft<sup>®</sup>, Canon PRINT Business, and uniFLOW Online) are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.**Fonts**PCL: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,  
Andalé Mono WT J/K/S/T (Japanese,  
Korean, Simplified and Traditional  
Chinese);<sup>13</sup> Barcode Fonts<sup>14</sup>

PS: 136 Roman

**Operating System<sup>15</sup>**UFRII/PS: Windows<sup>®</sup> 10/11/Server 2012/Server 2012  
R2/Server 2016/Server 2019/Server 2022,  
macOS (10.13 or later)

PCL:

Windows<sup>®</sup> 10/11/Server 2012/Server 2012  
R2/Server 2016/Server 2019/Server 2022

PS:

Windows<sup>®</sup> 10/11/Server 2012/Server 2012  
R2/Server 2016/Server 2019/Server 2022,  
macOS (10.13 or later)PPD: Windows<sup>®</sup> 10/11, macOS (10.13 or later)**Copy Specifications****First-Copy-Out Time (LTR)**

C3935i: Approx. 5.5 seconds (BW)/

7.4 seconds (Color)

C3930i/ Approx. 6.1 seconds (BW)/

C3926i 8.4 seconds (Color)

**Copy Resolution (dpi)**

600 x 600

**Multiple Copies**

Up to 999

**Magnification**

25%-400% (1% Increments)

**Preset Reduction/Enlargement**25%, 50%, 64%, 73%, 78%, 100% (1:1), 121%, 129%, 200%,  
400%**Scan Specifications****Type**Single-pass Duplexing Automatic Document Feeder<sup>16</sup>**Document Feeder Paper Capacity**

Up to 200 Sheets (20 lb. Bond)

**Document Feeder Supported Media Sizes**11" x 17", Legal, Letter, Letter-R, Statement, Statement-R,  
Custom Size: 2-3/4" x 5-1/2" to 12" x 17" (69.9 mm x 139.7  
mm to 304.8 mm x 431.8 mm)**Document Feeder Supported Media Weights**BW/Color 13.3 lb. Bond to 80 lb. Cover (50 to  
Original: 220 g/m<sup>2</sup>)**Platen Acceptable Originals**

Sheet, Book, 3-Dimensional Objects

**Platen Maximum Scanning Size**

Up to 11-3/4" x 17" (297.0 mm x 431.8 mm)

**Pull Scan**

Color Network ScanGear2 for both Twain and WIA

Supported OS: Windows<sup>®</sup> 8.1/10/Server 2012/Server 2012  
R2/Server 2016**Scan Resolution (dpi)**

Scan for Copy: 600 x 600

Scan for Send: Push (600 x 600), SMB/FTP/WebDAV,  
Pull (600 x 600)

Scan for Fax: 600 x 600

**Scan to Mobile Devices and Cloud-based Services**

A range of solutions is available to provide scanning to mobile devices and cloud-based services depending on your requirements.

**Scan Speed (LTR) (BW/CL)**

Single-sided 135 ipm (300 dpi)/80 ipm (600 dpi)

**Scanning:**

Double-sided 270 ipm (300 dpi)/160/90 ipm (600 dpi)

**Scanning:****Send Specifications****Destination**Standard: E-mail/Internet FAX (SMTP), SMB 3.0,  
FTP, WebDAV, Mail Box

Optional: Super G3 FAX, IP Fax

**Address Book**

LDAP (2,000)/Local (1,600)/Speed Dial (200)

**Send Resolution (dpi)**

Push: Up to 600 x 600 dpi

Pull: Up to 600 x 600 dpi

**Communication Protocol**

File: FTP (TCP/IP), SMB 3.0 (TCP/IP), WebDAV

Email: SMTP, POP3

**File Format**TIFF, JPEG, PDF(Compact, Searchable, Apply Policy,  
Optimize for Web, PDF/A-1b, Trace & Smooth, Encrypted,  
Device Signature, User Signature), XPS (Compact,  
Searchable, Device Signature, User Signature), Office  
Open XML (PowerPoint, Word)**Fax Specifications****Maximum Number of Connection Lines**

2

**Modem Speed**

Super G3: 33.6 Kbps

G3: 14.4 Kbps

**Compression Method**

MH, MR, MMR, JBIG

**Resolution (dpi)**

400 x 400, 200 x 400, 200 x 200, 200 x 100

**Sending/Receiving Size**

Statement-R to 11" x 17"

**Fax Memory**

Up to 30,000 Pages (2,000 Jobs)

**Speed Dials**

Max. 200

**Group Dials/Destinations**

Max. 199 Dials

**Sequential Broadcast**

Max. 256 Addresses

**Memory Backup**

Yes

## Store Specifications

### Box (Number Supported)

100 User In-boxes, 1 Memory RX In-box, 50 Confidential Fax In-boxes, Maximum 10,000 Pages (2,000 Jobs Stored)

### Advanced Box

Communication Protocol: SMB or WebDAV

#### Supported

Client PC: Windows® 10/11

Concurrent Connections (Max.)

SMB: 64

WebDAV: 3 (Active Sessions)

### Advanced Box Available Disc Space

Standard: 16 GB (With Option: max. 480 GB)

## Security Specifications

### Authentication and Access Control

User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express<sup>17</sup> (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)

### Document Security

Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print<sup>18</sup>), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Document Tracking (Secure Watermark)

## Network Security

TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), WPA3 support (Wi-Fi), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), Communication Line Separation (G3 FAX, USB Port, Advanced Space, Scan and Send-Virus Concerns for E-mail Reception)

## Device Security

Protecting SSD Data [SSD Data Encryption (FIPS140-2 Validated), SSD Lock], Standard SSD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFP Software Integrity, Automatic Recovery, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection)

## Device Management and Auditing

Administrator Password, Digital Certificate and Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

## Environmental Specifications

### Operating Environment

Temperature: 50 to 86 °F

Humidity: 20 to 80 % RH (Relative Humidity)

### Power Requirements

110V-127V, 60Hz, 8.5A

### Power Consumption

Maximum: Approx. 1,500 W

Sleep Mode: Approx. 0.8 W<sup>19</sup>

Typical Electricity Consumption (TEC) Rating<sup>20</sup>

C3935i: 0.33 kWh

C3930i: 0.29 kWh

C3926i: 0.26 kWh

### Standards

ENERGY STAR® Certified

Rated EPEAT® Gold<sup>5</sup>

## Consumables

### Toner<sup>21</sup>

GPR-66 Toner BK/C/M/Y

GPR-66L Toner C/M/Y

### Toner Yield (Estimated @ 5% Coverage)

GPR-66 Toner

38,000 pages

GPR-66 Toner

25,500 pages

GPR-66L Toner

11,000 pages

<sup>1</sup> Subscription to a third-party cloud service required. Subject to third-party cloud service providers' Terms and Conditions.  
<sup>2</sup> Third-party SIEM system required. Subject to third-party SIEM system's Terms and Conditions. Canon cannot ensure compatibility with all third-party SIEM systems.

<sup>3</sup> This feature is off by default and must be turned on by the user. Warm-up times are affected once turned on.  
<sup>4</sup> Requires additional option.  
<sup>5</sup> For current EPEAT rating (Gold/Silver/Bronze), please visit [www.epeat.net](http://www.epeat.net).

<sup>6</sup> Envelope Feeder Attachment A (standard) is required.

<sup>7</sup> Time from device power-on until copy ready (not print reservation).  
<sup>8</sup> Time from exiting Sleep mode to when printing is operational.

<sup>9</sup> Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display.  
<sup>10</sup> Includes Single Pass DADF.

<sup>11</sup> With right cover open + Multi-purpose tray extension extended + paper cassette open.

<sup>12</sup> Includes Staple Finisher-AE1/Booklet Finisher-AE1 + Copy Tray-T1 extension extended + paper cassette open.

<sup>13</sup> Requires the optional PCL International Font Set-A1.

<sup>14</sup> Requires the optional Barcode Printer Kit-D1.

<sup>15</sup> Other operating systems and environments, including AS/400, UNIX, Linux, and Citrix, may be supported. Some solutions are chargeable. SAP Device Types are available via the SAP Market Place. For more information, contact your sales representative.

<sup>16</sup> Detect Feeder Multi Sheet Feed is supported.

<sup>17</sup> No charge for this solution; however, activation is required.

<sup>18</sup> Requires uniFLOW Online/uniFLOW.

<sup>19</sup> 0.8 W Sleep mode not available in all circumstances due to certain settings.

<sup>20</sup> Based on ENERGY STAR Product Specification for Imaging Equipment Version 3.0.

<sup>21</sup> GPR-66L Toner also available for Color (C, M, Y). Yield (estimated @ 5% coverage) is 11,000 images.

